


DoTile[®] High Performance Floorings



Made in Italy



» CARATTERISTICHE «

SHOCK ABSORPTION TECHNOLOGY: grazie alla sua densità assorbe gli urti in caso di caduta degli attrezzi, senza rovinarsi e preservando la superficie sottostante.

REBOUND CONTROL: massimizza la sicurezza degli atleti smorzando i rimbalzi di pesi e bilancieri.

STRESS DISCHARGE: aiuta l'atleta a scaricare lo stress dalle articolazioni durante gli esercizi.

PERFORMANCE: grazie al suo grip garantisce all'atleta le massime performance, permettendogli di concentrarsi esclusivamente sugli esercizi che sta svolgendo.

COMFORT: in caso di esercizi a contatto con il terreno garantisce un comfort superiore.

» FEATURES «

SHOCK ABSORPTION TECHNOLOGY: thanks to its composition, it absorbs the impact when the weights fall, without getting damaged and preserving the underlying surface.

REBOUND CONTROL: maximizes the safety of athlete, reducing the rebounds of weights and barbells.

STRESS DISCHARGE: helps the athlete to release stress from the joints, subjected to high loads and efforts during the exercises.


PERFORMANCE: thanks to its grip it allows the athlete to focus on his exercises, without fear of slipping or losing the foothold.

COMFORT: it ensures a superior comfort on performing exercises with ground contact.

DoTile® Rugged Floorings

Made in Italy


FEATURES COMPARISON

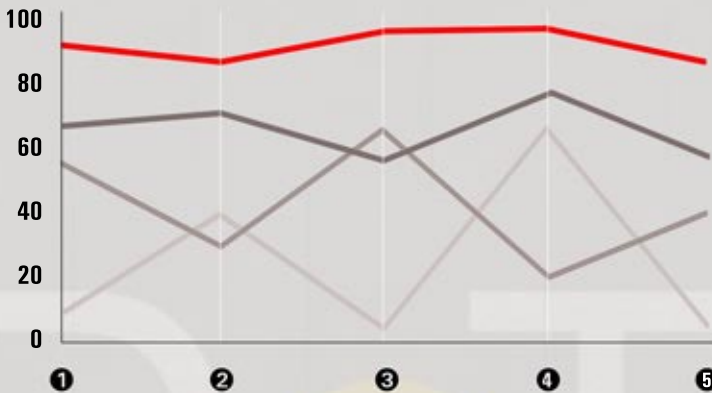

- DoTile fit®
 - Rubber Roll
 - Parquet
 - Concrete
- 1 shock absorption technology
 - 2 rebound control
 - 3 stress discharge
 - 4 grip
 - 5 comfort

SPECIFICATIONS

RECOMMENDED ON

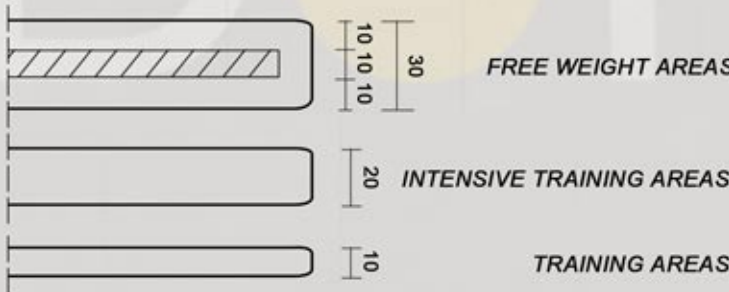

spessori disponibili con pannello interno
available thickness with internal panel

30 mm, 40mm

spessori disponibili senza pannello interno
available thickness without internal panel

10 mm, 20 mm
30 mm, 40 mm

dimensioni piastre
tiles dimensions

500 x 500 mm

