

# ASX5000

COD. ASX-5000

**OPTIONAL**



COD. J-ARMSASX5000  
Jammer arms per ASX-5000  
Jammer arms for ASX-5000  
Cod. EAN 8029975805894



COD. LAT-SEATASX5000  
Lat seat per ASX-5000  
Lat seat for ASX-5000  
Cod. EAN 8029975805900




COD. LEG-PRESS4-5  
Leg press per ASX-4000 e ASX-5000  
Leg press for ASX-4000 and ASX-5000  
Cod. EAN 8029975805917



COD. W-HOLDERASX5000  
Perno porta pesi per ASX-5000  
Weight plates holder for ASX-5000  
Cod. EAN 8029975805924



COD. M-BARASX5000  
Multifunctional bar per ASX-5000  
Multifunctional bar for ASX-5000  
Cod. EAN 8029975805948

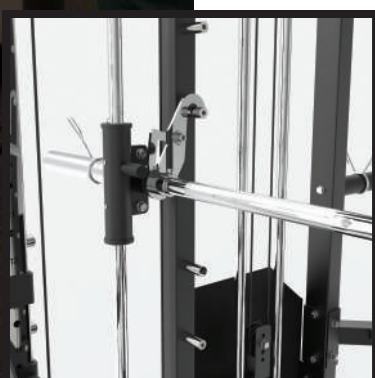

- PESO MASSIMO UTILIZZATORE 135 Kg  
MAX USER WEIGHT 135 Kg
- PULLEY regolabile 266x1841 mm su 22 livelli interasse 75 mm  
PULLEYS adjustable on 22 levels (266x1841 mm) distance 75 mm
- J-CUP/SAFETY SPOTTER ARMS Extra strong spessore 5 mm con protezione UHMW (Ultra High Molecular Weight). Regolabile 316-1816 mm su 31 livelli interasse 50 mm  
J-CUP/SAFETY SPOTTER ARMS Extra strong - 5 mm thickness with UHMW (Ultra High Molecular Weight) protection pads, adjustable on 31 levels (316-1816 mm) distance 50 mm
- DIMENSIONE PRODOTTO 1944x 1670x2170 mm  
SET UP SIZE 1944x1670x2170 mm
- STRUTTURA TUBOLARE a sezione rettangolare 50x70 mm - spessore 2,5 mm/2 mm e quadrata 50x50 mm - spessore 2 mm  
TUBING SECTION rectangular tubing 50x70 mm - thickness 2,5 mm/2 mm and square tubing 50x50 mm - thickness 2 mm
- BILANCIERE 1944mm, scorrimento su cuscinetti a sfera, 2 sicurezze con gancio regolabile, regolabili su 11 posizioni (539 - 1861 mm), passo 150 mm. Diametro porta dischi da 50 mm. Sistema brevettato di aggancio bilanciere ai pacchi peso.  
BARBELL 1944mm, linear bearings sliding, 2 safety systems with hook to avoid barbell falling, vertically adjustable on 11 levels (539 - 1861 mm), distance 150 mm. Weight plate holder diameter suitable for ø50 mm weight plates. Patented system to link the barbell to the weight stacks.
- DOTAZIONI/NOTE 3-IN-1 dual pulley, smith machine, rack. 2 J-hook, coppia fermi di sicurezza bilanciere con rulli gambe in foam, barra trazioni multi presa, parallele, porta bilanciere, 4 porta dischi ø50 mm, 4 ferma dischi a molla ø49 mm, 2 ferma dischi a molla ø47 mm. Attachments : cavigliera, corda, catena, landmine, 2 maniglie trazioni con catena regolabile, barra tricipiti, barra tricipiti dritta, bilanciere e bilanciere CURL, pedana antiscivolo.  
EQUIPMENT/NOTES 3-IN-1 dual pulley, smith machine, rack. 2 J-hooks, 2 safety spotter arms with 1 set leg holder foam, multi-grip chin-up bar, dip up bar, barbell storage, 4 weight plates holders for ø50 mm plates, 4 olympic spring clips ø49 mm, 2 spring clips ø47 mm. Attachments : ankle strap, rope, chain, landmine, 2 Y- handles with adjustable chain, V-bar, short straight bar, straight bar and curved bar, non-slip metal footplate.